


TECHNICAL DATA SHEET 6AA

ARCADE 3 MOTORISED SHUTTERS SUGGESTED PLAN DETAILS & BULKHEAD CLEARANCES

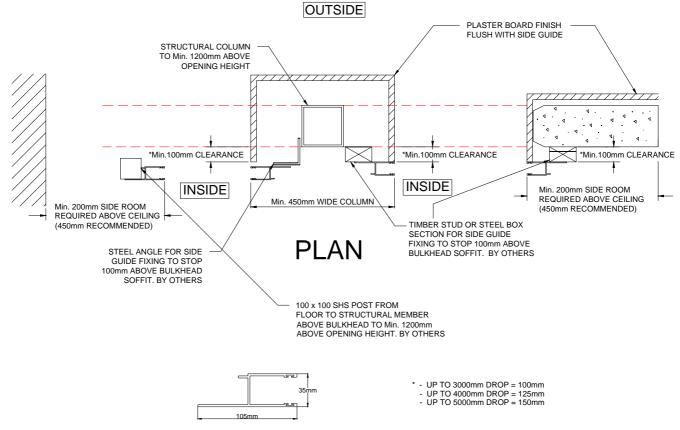

STADIUM - ROLLER GRILLE SIDE GUIDE

Refer Diagrams (Sheet 5AA)	ARCO QLD TYPICAL DIMENTIONS REQUIRED FOR VARIUS DROP										
	Drop height	1800	2100	2400	2700	3000	3300	3600	3900	4200	4500
	Bundle Dia	360	370	380	390	400	410	420	430	440	450
	Min Vertical Clearance MOTOR BELOW (mm)	860	885	890	895	900	905	910	915	920	925
	Min Vertical Clearance MOTOR ABOVE (mm)	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
	Min Vertical Clearance MOTOR BEHIND (mm)	680	690	700	710	720	730	740	750	760	770
	Min Total Horizontal Internal Bulkhead Clearance Required Refer to Sheet 5AA Drawings for Operational Clearances										

ARCO (QLD) has a continuous program of product development and reserves the right to change specifications at any time without notice

PLEASE NOTE: 1. IF INADEQUATE ACCESS IS PROVIDED ARCO (QLD) WILL NOT B E HELD RESPONSIBLE FOR MAINTENANCE OR THE COSTS INCURRED TO CREATE ADEQUATE ACCESS 2. ARCADE 3 ROLLER SHUTTERS WEIGH APPROXIMATELY 25kg/m². THEREFORE THE SHUTTERS MUST BE INSTALLED TO STRUCTURAL SUPPORTS, I.E. RHS STEEL POST, CORE FILLED MASONARY, TILT UP CONCRETE PANELS

- CORE FILLED MASONARY, TILT UP CONCRETE PANELS 3. ALL STRUCTURAL SUPPORTS FOR BRACKETS AND SIDE GUIDES TO BE PROVIDED BY OTHERS
- 4. THE ABOVE DETAILS ARE ONLY APPLICABLE TO THE ARCADE 3 ROLLER SHUTTER
- 5. ALL WIRING AND SETTING OF LIMITS BY OTHERS (OPTIONAL)